

Enable/Disable UPC-A

Parameter # 1

To enable or disable UPC-A, scan the appropriate bar code below.




***Enable UPC-A
(1)**



**Disable UPC-A
(0)**

To disable the country code, but to enable the leading digit for UPC-A, scan:

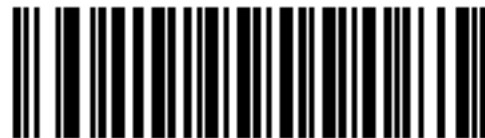

***System Character (<SYSTEM CHARACTER> <DATA>
(1)**

To disable the country code, AND to disable the leading digit for UPC-A, scan:



**No Preamble (<DATA>
(0)**

Enable/Disable UPC-E

Parameter # 2

To enable or disable UPC-E, scan the appropriate bar code below.



***Enable UPC-E
(1)**



**Disable UPC-E
(0)**

To disable the country code, but to enable the leading digit for UPC-E, scan:



***System Character (<SYSTEM CHARACTER> <DATA>
(1)**

To disable the country code, AND to disable the leading digit for UPC-E, scan:



**No Preamble (<DATA>
(0)**